

BLOCKFAST AC-300

High range water
reducer accelerators



Description:

BLOCKFAST AC 300 is polycarboxylate ether based concrete accelerator and is supplied as a light Yellow liquid. When added to cementitious mixes it accelerates hydration and enables the water content to perform more efficiently by dispersing agglomerated cement particles. This further improves strength by enabling water reduction to be made at constant workability.

Uses:

- Fast accelerating admixture for paver & precast industries and higher grade of concrete
- High range accelerator for concrete works either reinforce or unreinforced
- Glossy and smooth surface for precast product
- Precast & pre-stress concrete work
- All types of low and high rise buildings

Advantages:

- High range accelerating admixture for both the unreinforced and reinforced cement concrete and mortar
- High range accelerating admixture for both the unreinforced and reinforce cement concrete or mortar
- High range water reducer for concrete or mortar with increase in workability
- Reduces segregation and increases compressive strength
- Reduces porosity in concrete and increases durability
- Early release from precast moulds rapidly increases production in industry

- Produce super smooth and glossy surface
- Reduces honeycomb in concrete structure
- Produces a homogenous, cohesive concrete generally without any tendency for segregation and bleeding

Product Standard Compliance:

- IS 9103:1999
- BS 5075 Part 1
- ASTM C1141, Type C

Company Standard Compliance:



Technical Information:

Properties	Specification
Appearance	Light yellow color liquid
Sp. Gravity	1.05 to 1.10 @25°C
pH Value (IS 9103:1999)	7 to 8
Chloride Content (IS 9103:1999)	Nil
Classification according to IS 9103 : 1999 (3.2)	Increases the rate of hydration of a hydraulic cement, shortens the time of set, or increases the rate of hardening or strength development.

Classification according to ASTM C1141	Type-C
Compatibility with Cement	May be used with all types of Portland cements. Not suitable for use with high alumina cement

Application Procedure:

BLOCKFAST AC-300 can be added into the mixing water or directly into the concrete mixture after 50-70% of the mixing water has been added. The addition of BLOCKFAST AC-300 to dry aggregates or cement is not recommended. To achieve optimum performance a minimum wet mixing time, which is depending on the mixing conditions and the mixer performance, of 60 seconds is recommended.

Dosage Range:

The optimum dosage of BLOCKFAST AC-300 to meet specific requirements should be determined by trials using the materials and conditions that will be experienced in use. The normal dosage range is between 0.6 to 1.5 % of cement.

Limitation:



- Excessive water addition or overdosing may cause bleeding or segregation.
- If frozen / separation of the product has occurred, Redwop BLOCKFAST AC-300 may be used after thawing slowly at room temperature and intensive mixing. Before application, suitability tests must be performed.

Basis of Product Data:

All technical data stated in this product data sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

Compatibility:

BLOCKFAST AC-300 may be combined with many other Redwop products. Trials must always be carried out before combining products in specific mixes. Contact Redwop Technical Services for additional information and any specific combinations.

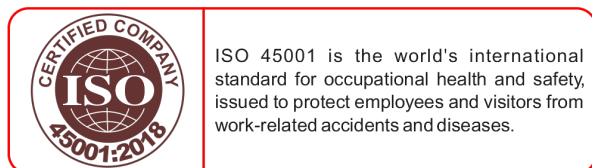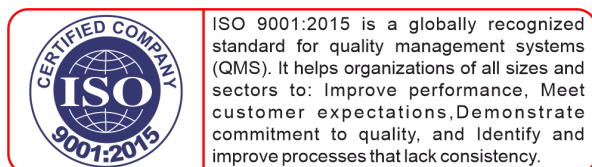

Packaging:

BLOCKFAST AC-300 is supplied in 220 kg drums.

Storage & Shelf-Life:

BLOCKFAST AC-300 has a minimum shelf life of 24 months provided the temperature is kept within the range of 2 °C to 50 °C. Should the temperature of the product fall outside this range then contact Redwop office for advice.

Health & Safety:

BLOCKFAST AC-300 does not fall into the hazard classifications of current regulations. However, it should not be swallowed or allowed to come into contact with skin and eyes.

Suitable protective gloves and goggles should be worn. Splashes on the skin should be removed with water. In case of contact with eyes rinse immediately with plenty of water and seek medical advice. If swallowed seek medical attention immediately - do not induce vomiting.

For further information refer the Safety Data sheet available for this product.

PRODUCT FOR PROFESSIONAL USE.

Fire:

BLOCKFAST AC-300 is water based & non- flammable.

Legal Notice:

The information, and, in particular, the recommendations relating to the application and end-use of Redwop products, are given in good faith based on Redwop's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Redwop's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Redwop reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.



ISO/IEC 17025 enables laboratories to demonstrate that they operate competently and generate valid results, thereby promoting confidence in their work both nationally and around the world.



ISO 14001 is the internationally recognized standard for environmental management systems (EMS). It provides a framework for organizations to design and implement an EMS, and continually improve their environmental performance

Country: India

format: RCPL/QA/025-00

issue Date: 2024-12-01 11:42:01